

# SOLO WP2863



1+



27,4 m<sup>2</sup>

## Material specification

- Stainless steel construction,
- Stainless steel screws and/or screws covered with plastic caps,




Facilitating disability



easy access



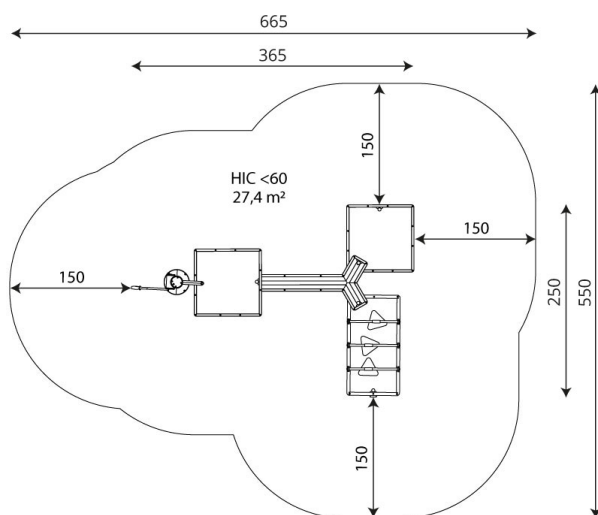

## Product technical sheet

# SOLO WP2863



### Product data

Length	365 cm
Width	250 cm
Total height	120 cm
Age group	1+ years
Safety zone	27,4 m2
Free fall height	<60 cm
In accordance with norm EN	1176-1:2017
Weight of the heaviest part	14,6 kg
Availability of spare parts	YES
Color options	

Data is subject to change without prior notice.

### Additional information

- equipment adapted for the disabled; intended for public playgrounds;
- anchoring on flat surface, 80/70/60 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

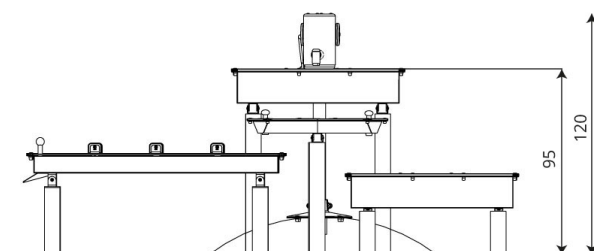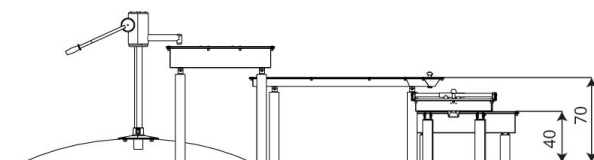

## Guarantee

- 30** 30 year guarantee - Structural strength of steel and stainless steel components
- 15** 15 year guarantee - Structural failure of steel and stainless steel, for dynamic equipment
- 10** 10 year guarantee - Structural failure of high density polyethylene and high pressure laminates components
- 5** 5 year guarantee - Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements

Detailed information in the guarantee card



## Surfaces according to EN 1176-1:2017

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		

## Product technical sheet

# SOLO WP2863

### Amount of safe surface corresponding with free fall height:

HIC <60 27,4 m<sup>2</sup>

Data is subject to change without prior notice.

