



## Product technical sheet

# SPRING 0608-2



1 - 12 years



1 kids



10,9 m<sup>2</sup>

## Material specification

- Powder galvanized and powder coated steel construction,
- Seats and side panels made of recycled HDPE boards resistant to weather conditions, green HDPE panels made of 100% recycled materials, e.g. ocean waste such as fishing nets and ropes,
- Steel springs 20 mm, iron phosphorated and powder coated,
- Handles made of stainless steel,
- Screws covered with plastic caps and/or stainless steel screws,




Physical development



rocking



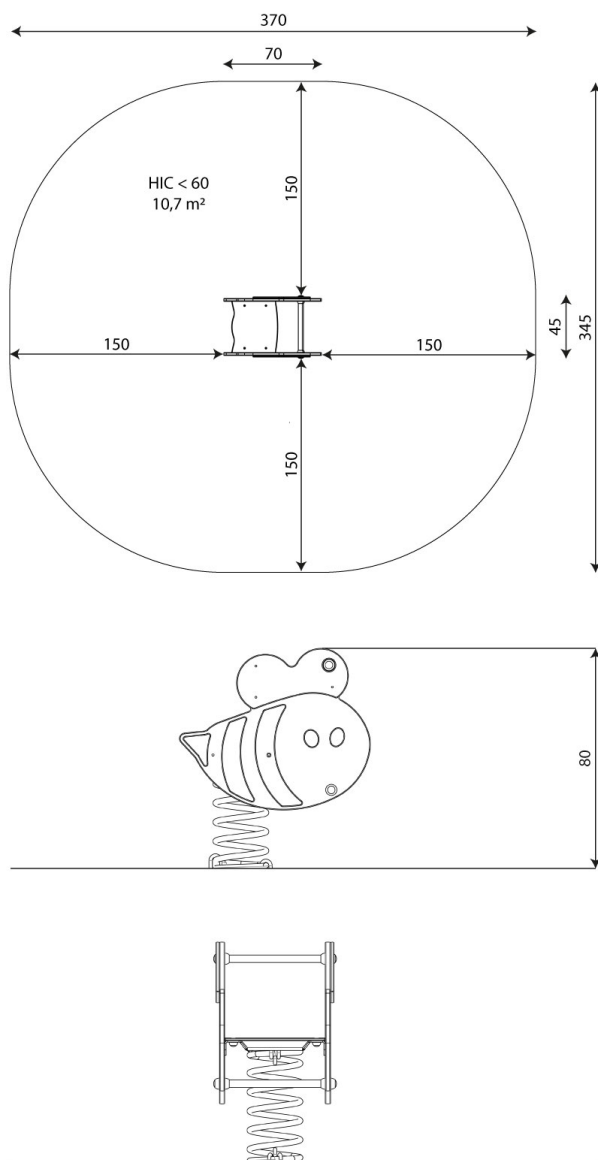

## Product technical sheet

# SPRING 0608-2

## Product data

|                                |              |
|--------------------------------|--------------|
| Length                         | 70 cm        |
| Width                          | 45 cm        |
| Total height                   | 80 cm        |
| Age group                      | 1 - 12 years |
| Number of users                | 1 kids       |
| Safety zone                    | 10,9 m2      |
| Free fall height               | <60 cm       |
| In accordance with norm EN     | 1176-1:2017  |
| Weight of the heaviest part    | 33 kg        |
| Dimensions of the largest part | 69x4x58 cm   |
| Span length                    | 1,5 cm       |
| Availability of spare parts    | YES          |
| Color options                  |              |

Data is subject to change without prior notice.

## Additional information

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jimmie the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

## Guarantee

|           |                                                                                 |           |                                                                                            |           |                                                                                                            |          |                                                                                                                                                                         |
|-----------|---------------------------------------------------------------------------------|-----------|--------------------------------------------------------------------------------------------|-----------|------------------------------------------------------------------------------------------------------------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>30</b> | 30 year guarantee - Structural strength of steel and stainless steel components | <b>15</b> | 15 year guarantee - Structural failure of steel and stainless steel, for dynamic equipment | <b>10</b> | 10 year guarantee - Structural failure of high density polyethylene and high pressure laminates components | <b>5</b> | 5 year guarantee - Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements |
|-----------|---------------------------------------------------------------------------------|-----------|--------------------------------------------------------------------------------------------|-----------|------------------------------------------------------------------------------------------------------------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Detailed information in the guarantee card



## Surfaces according to EN 1176-1:2017

|                                 | Description (mm)             | Layer thickness (cm) | Maximum fall heights (cm) |
|---------------------------------|------------------------------|----------------------|---------------------------|
| Turf/ top layer of soil (A,B,C) | -                            | -                    | ≤100                      |
| bark (A,C)                      | Particle size from 20 to 80  | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| woodchips (A,C)                 | Particle size from 5 to 30   | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| sand or gravel (A,C)            | Particle size from 0,25 to 8 | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| synthetic attested (A,B,C)      | Tested according to EN 1177  |                      | <60                       |

## Product technical sheet

# SPRING 0608-2

### Amount of safe surface corresponding with free fall height:

HIC <60 10,7 m<sup>2</sup>

Data is subject to change without prior notice.

